

The Herschel Select XLS LED Front-Lit infrared panel heater represents the next evolution in smart, space-saving comfort, combining highly efficient radiant heating with integrated LED lighting in one ultra-slim, contemporary panel. Designed for modern interiors where both warmth and lighting are required, it delivers comfortable, even infrared heat while enhancing the atmosphere with customisable front-lit illumination. Available in 400W and 600W models, the Select XLS LED offers a discreet, maintenance-free solution for residential and commercial spaces including homes, offices, hospitality, and retail environments.


Incorporating Herschel's SMART-R receiver technology, the Select XLS LED Front-Lit panel works seamlessly with wireless SmartLED controls (T-BTLED battery thermostat or T-MTLED mains thermostat, sold separately), enabling intuitive control of both heating and lighting. When paired with compatible controllers (T-MTLED), users can manage the panel via App and voice control, including integration with Alexa and Google Assistant. The fully dimmable LED lighting offers a range of white colour temperature options (3000-6000k), allowing the ambience of the space to be tailored with ease. Suitable for wall mounting, ceiling mounting, or suspension, the panel offers flexible installation options, with professional fitting recommended.


## Available Models

Model Number	Dimensions	Weight	Power	Heated Area*
XLS400WLF	62 x 62 cm	6.2 kg	400 W	6 - 8 m <sup>2</sup>
XLS600WLF	47 x 122 cm	10 kg	600 W	11 - 13 m <sup>2</sup>

\* The heated areas are an indicative guide only. The actual heated area will depend on the heat loss of the room which is influenced by many factors including construction type, external walls, window area and insulation levels. Always use the Herschel online calculator or contact your dealer or installer for an accurate specification.

## Technical Details

Surface	Steel powder-coated
Colour	White 9003
Rear Panel	Sheet steel
Surface Temperature	95 - 105°C
Voltage	220 - 240V 50 Hz
Protection Class	IP44
Cable	1.8m
Installation	Wall or ceiling mounted
Certificates	
Warranty	5 years

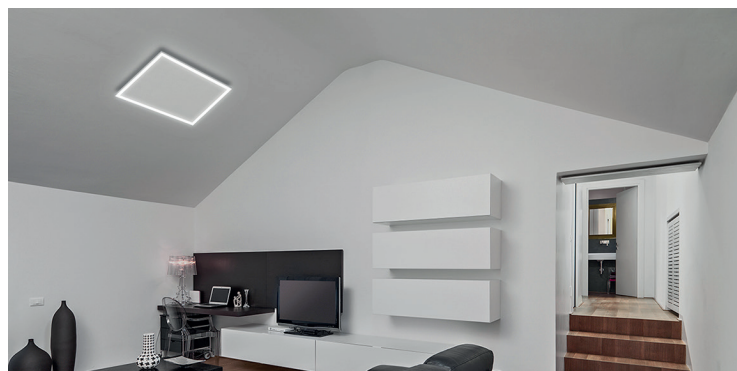

## Important

The panel will radiate heat into the room and will perform best when mounted in a position free of any direct obstructions such as a sofa. Refer to installation instructions for full details.